

# ARCTIKO LF 1400

true cooling specialists



## HIGH LEVEL OF SECURITY FOR YOUR SAMPLES, DUE TO THE GREAT COOLING PERFORMANCE WITH AIR FORCED COOLING.

Automatic defrost saves you time to focus on what's most important and stores the samples safely.

### ► STAINLESS STEEL

This unit can be made in an ATEX version – approved according to EN 60079-15 category 3, zone 2. CE EX 11/3 G.

### ► FLEXIBLE STORAGE SOLUTIONS

This freezers is a functional freezer with flexible storage solutions. The freezer is highly customizable allowing for maximum flexibility in frozen biologicals or other samples you store within.

This allows the user to organize their unit exactly as desired. Our universal shelf and drawer guides allow you to mix shelves and drawers for flexible storage.

### ► EXCEPTIONAL COOLING

Arctiko has combined the high quality cooling performance created by air-forced cooling and automatic defrosting.

The results meet the more stringent requirements for lower power consumption, more precise cooling uniformity, need for temperature and alarm surveillance, documentation and validation, making the LF 1400 the perfect solution for biomedical storage.



FORCED AIR COOLING



AVAILABLE IN ATEX




FILTERLESS CONSTRUCTION



FLEXIBLE SHELVES

The ARCTIKO LF 1400 model supports following optional features:

- Modbus adapter for G214 controller
- Temperature chart recorder
- GSM alarm module
- Voltage converter
- Voltage stabilizer
- Stainless steel drawers
- Perforated shelf stainless steel
- Stainless steel shelf
- Wire shelf
- LED Light

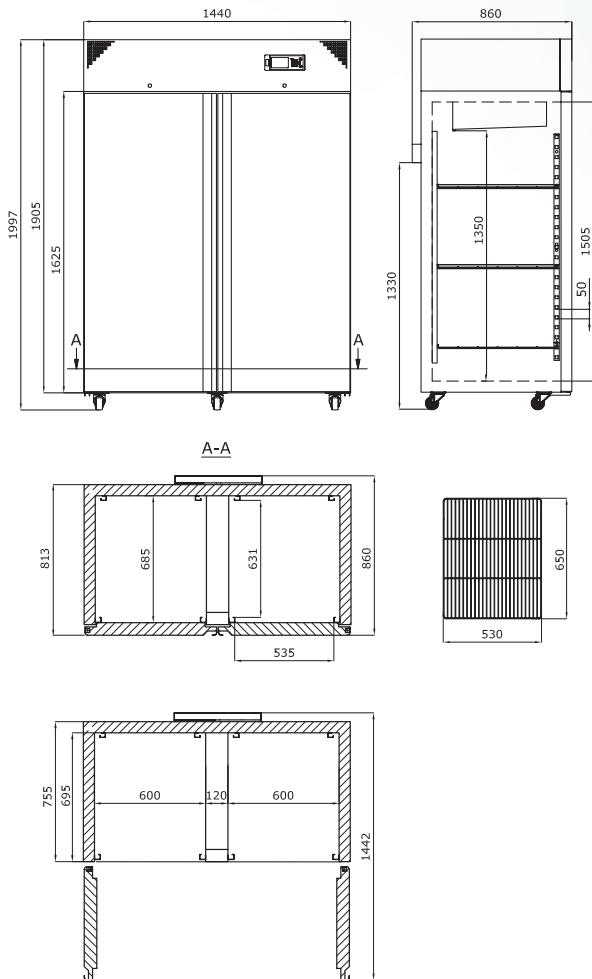

Certificate No: 33037



Certificate No: 0000320341-PA-NA-NOR



MODEL	LF 1400
Item code	DAI 0275
Temperature range (°C)	-10 / -30
Max. ambient temperature (°C)	25
Capacity (L)	1361
Exterior dimensions WxDxH (mm)	1440x860x1997
Interior dimensions WxDxH (mm)	1320x685x1505
Weight (kg)	195
Insulation (mm)	60
Cooling technology	forced air
Controller model / probe type	G214 / PT1000
Power supply (V)	230*
Frequency (Hz)	50*
Power consumption (kWh/24h)	18.1
AMP (A)	4.9
Power (Watt)	964
Horse power (HP)	11/4
Alarm display as text - not codes	yes
Visual / acoustic alarm	yes / yes
Power failure alarm	yes
Adjustable high / low temperature alarm	yes / yes
Open door alarm	yes
Probe failure alarm	yes
Low battery alarm	yes
Compressor failure alarm	no
Battery backup for alarms (approx. hrs.)	72
Voltage free contact for remote alarm (e.g. GSM alarm module)	yes
Electronic data logger	yes
RS 485 port	yes
USB port for software update & data download	yes
Temperature chart recorder	optional
Display type	4,3" with touch buttons
Number of optional reference probes	2
Password protection for turning unit on / off	yes
Temperature graph on display	yes
Automatic defrost	yes
Antifreeze function	no
Vacuum release port	no
Access port for external probe etc. (int. diameter mm)	12
Light	no
Lock with key	yes
Castors (total pcs) / castors with brake (pcs)	5 / 3
Fixed feet (pcs) / levelling feet (pcs)	no
Sub lids / inner doors (pcs)	no
Reversible door(s)	no
Fixed shelves (pcs) / adjustable shelves (pcs)	0 / 6
Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)	46 / 22
Max. load per shelf (kg)	30
Adjustable drawers (pcs)	optional
Max. no. of adjustable drawers (pcs)	16
Max. load per adjustable drawer (kg)	30
Number of compressors	1
Refrigerant	R290
Interior cabinet material	stainless steel
Exterior cabinet material	painted steel
Colour (exterior cabinet)	white
Foam type	polyurethane
VIP vacuum insulated panels	no
Shipping weight (kg)	278
Shipping dimensions WxDxH (cm)	156x101x220
Shipping volume (m³)	2.96