

ARCTIKO PR 300

true cooling specialists



OFFERS A GREAT OVERVIEW OF THE STORED ITEMS DUE TO THE DOUBLE PANE GLASS DOOR.

Designed to meet the demands of the pharmaceutical & biotechnology industries providing reliability, accuracy and sample security.

► SPARK FREE INTERIOR

Arctiko's PR range can be made in an ATEX version - approved according to EN 60079-15 category 3, zone 2. CE EX 11-/3 G.

► FLEXIBLE STORAGE SOLUTIONS

Arctiko's PR range is a highly customizable allowing you to choose between a wide range of universal shelves and drawers.

This allows the user to organize their unit exactly as desired. Our universal shePR and drawer guides allow you to mix shelves and drawers for flexible storage.

► GREAT COOLING PERFORMANCE

Forced air cooling provides superior temperature uniformity and stability.

Forcing the airflow around the shelves and the stored items, ensures that all parts of the unit is equally cold and avoids any cold or hot spots.

Distributed by a powerful fan and open air flow areas along the sides, the air is always distributed evenly throughout the fully loaded unit.



FORCED AIR COOLING



FILTERLESS CONSTRUCTION



FLEXIBLE SHELVES




AVAILABLE IN ATEX

PR 300*

The ARCTIKO PR 300 model supports following optional features:

- Modbus adapter for G214 controller
- Temperature chart recorder
- GSM alarm module
- Voltage converter
- Voltage stabilizer
- Stainless steel drawers
- Shelves (perforated, wire plastic coated, wire stainless steel)
- Stacking kit
- LED Light

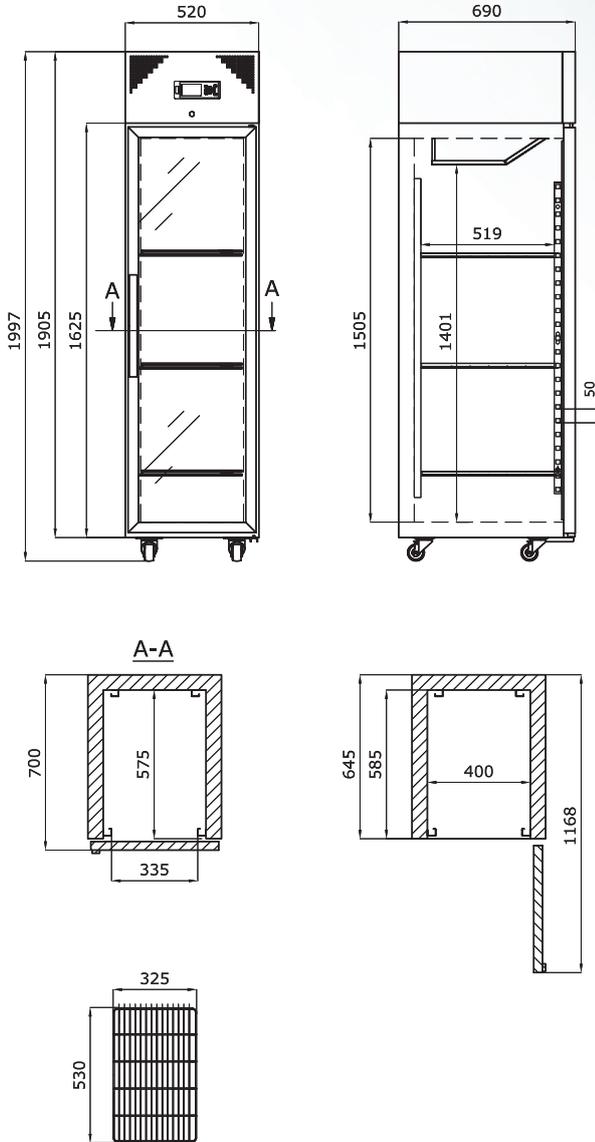

MODEL	PR 300	
Main specifications	Item code	DAI 0885
	Temperature range (°C)	+1 / +10
	Max. ambient temperature (°C)	32
	Capacity (L)	352
	Exterior dimensions WxDxH (mm)	520x690x1997
	Interior dimensions WxDxH (mm)	400x585x1505
	Weight (kg)	103
	Insulation (mm)	60
	Cooling technology	forced air
	Controller Model / probe type	G214 / PT1000
Power	Power supply (V)	230*
	Frequency (Hz)	50*
	Power consumption (kWh/24h)	3.4
	AMP (A)	1.4
	Power (Watt)	228
	Horse power (HP)	1/8
Alarm functions	Alarm display as text - not codes	yes
	Visual / acoustic alarm	yes / yes
	Power failure alarm	yes
	Adjustable high / low temperature alarm	yes / yes
	Open door alarm	yes
	Probe failure alarm	yes
	Low battery alarm	yes
	Compressor failure alarm	no
	Battery backup for alarms (approx. hrs.)	72
Data logging & external connection	Voltage free contact for remote alarm (e.g. GSM alarm module)	yes
	Electronic data logger	yes
	RS 485 port	yes
	USB port for software update & data download	yes
Display features	Temperature chart recorder	optional
	Display type	4,3" with touch buttons
	Number of optional reference probes	2
	Password protection for turning unit on / off	yes
Other features	Temperature graph on display	yes
	Automatic defrost	yes
	Antifreeze function	no
	Vacuum release port	no
	Access port for external probe etc. (int. diameter mm)	12
	Light	yes
	Lock with key	yes
	Castors (total pcs) / castors with brake (pcs)	4 / 2
	Fixed feet (pcs) / levelling feet (pcs)	no
	Sub lids / inner doors (pcs)	no
	Reversible door(s)	yes
	Fixed shelves (pcs) / adjustable shelves (pcs)	0 / 3
	Max. no. of shelves (pcs) / recommended max. no. of shelves (pcs)	23 / 11
	Max. load per shelf (kg)	30
Refrigeration & cabinet	Adjustable drawers (pcs)	optional
	Max. no. of adjustable drawers (pcs)	8
	Max. load per adjustable drawer (kg)	30
	Number of compressors	1
	Refrigerant	R290
	Interior cabinet material	stainless steel
Shipping	Exterior cabinet material	painted steel
	Colour (exterior cabinet)	white
	Foam type	polyurethane
Shipping	VIP vacuum insulated panels	no
	Shipping weight (Kg)	160
	Shipping dimensions WxDxH (cm)	83x67x220
Shipping volume (m³)	1,22	

*110V/60Hz available as option

*60Hz also available.